



The here newly conceived pressure point fulfills all conditions for the application in a modern single- or multipoint press. A hydraulically pressurized up cushion laid out for a pressing force depending upon need in pot execution with an overload way of 25 mm + 2 mm of reserve. The adjusted hydraulic prestress pressure corresponds to the nominal pressing force. The pressure point is down centered by a mounting hole in the slide plate. In the range of the guidance of the adjusting spindle the pressure point is fixed by two mounting holes (for the admission of the horizontal forces of the slide drive).

**NEW**

### Construction series

Press force (kN)	Stroke height (mm)	Pressure points	Slide adjustability way (mm)	Overload way (mm)
2500	315	2	150	20
4000	400	2	150	20
6300	400	2	200	25
8000	500	2	200	25
10000	500	2	200	25



Fluid Control Engineering GmbH  
Hohenwindenstraße 13  
D-99086 Erfurt  
Tel: +49 (0) 361 / 74 91 450  
Fax: +49 (0) 361 / 73 09 630  
E-Mail: [info@fluid-control.de](mailto:info@fluid-control.de)  
[www.fluid-control.de](http://www.fluid-control.de)

i


K-Info 3 / 2002

# FCE Fluid Control Engineering GmbH

New pressure point for mechanical presses -  
Representation of the arrangement in the slide


**Side view:**

*Assembled in the slide;  
Function lots exterior  
surfaces with rust protection  
color primes.*

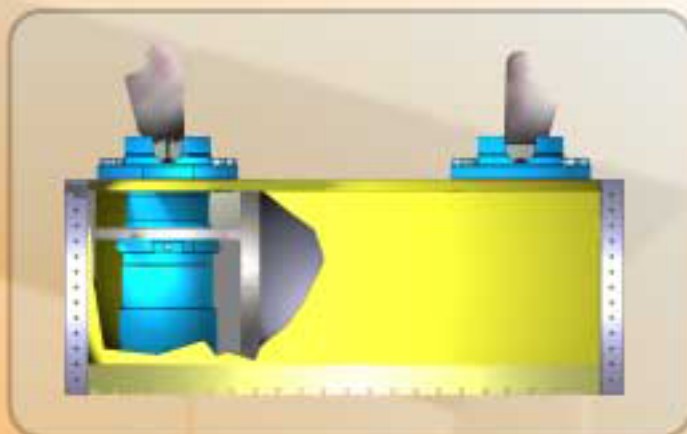


**Top view of right:**

*Pressure point, under  
spanning, by screws  
secured*

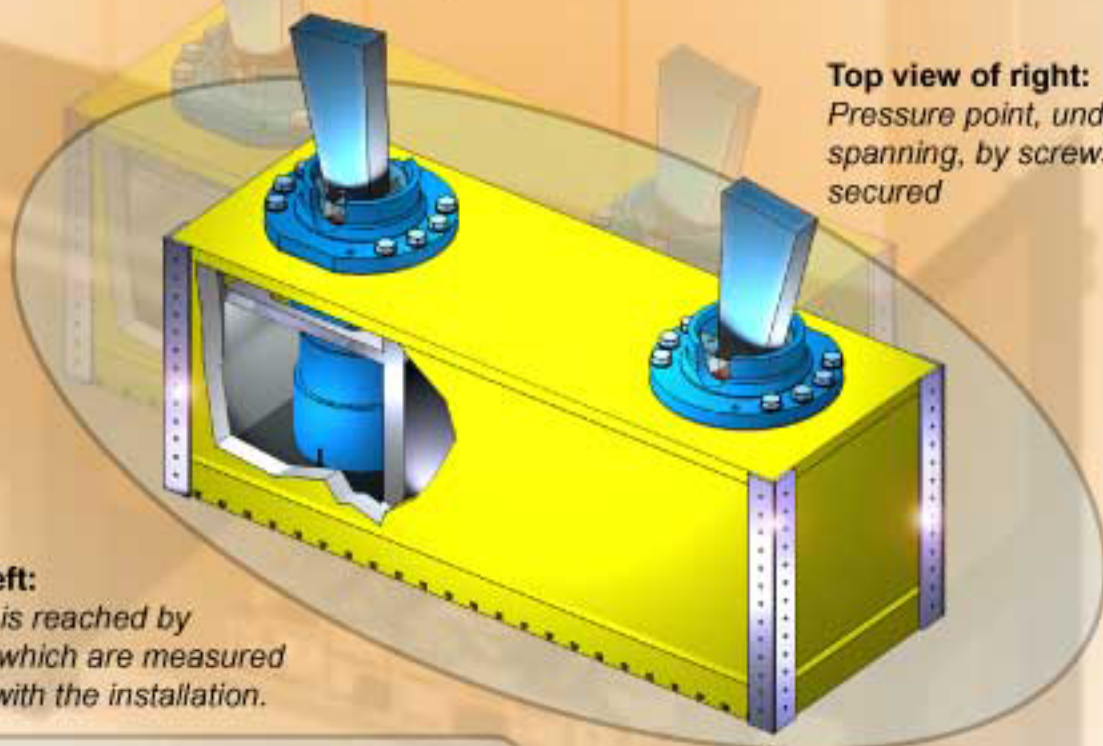

**Top view of left:**

*The spanning is reached by  
supplements, which are measured  
and adjusted with the installation.*

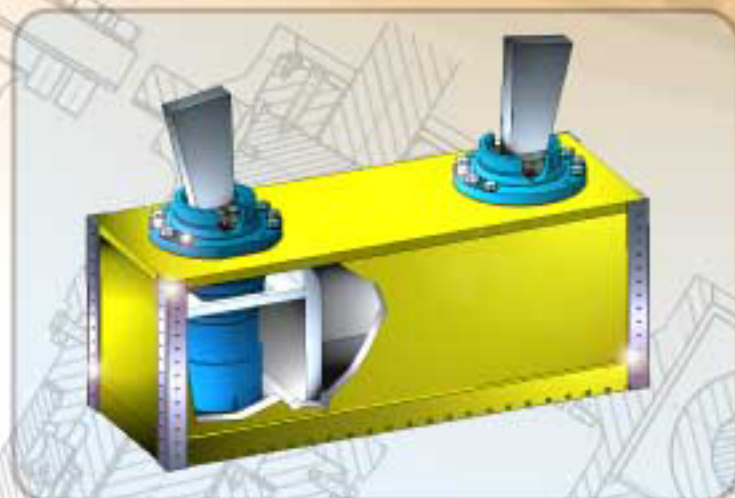

Fluid Control Engineering GmbH  
Hohenwindenstraße 13  
D-99086 Erfurt  
Tel: +49 (0) 361 / 74 91 450  
Fax: +49 (0) 361 / 73 09 630  
E-Mail: [info@fluid-control.de](mailto:info@fluid-control.de)  
[www.fluid-control.de](http://www.fluid-control.de)